


Description

Tracks improve floatation over soft, sandy, rocky or muddy ground and provide better traction on slippery surfaces. Note: Only pneumatic tyres and tyres with Superflex formula poly fill manufactured by Arnco are permitted for use inside steel tracks. Bobcat® factory poly-filled tyres meet this requirement. All other tyres including Bobcat® Solid Tyres (Twin Flex, Smooth Flex, Smooth Solid, etc.) are considered non-approved. The use of non-approved tyres will void the loader and track warranties.

Dimensions

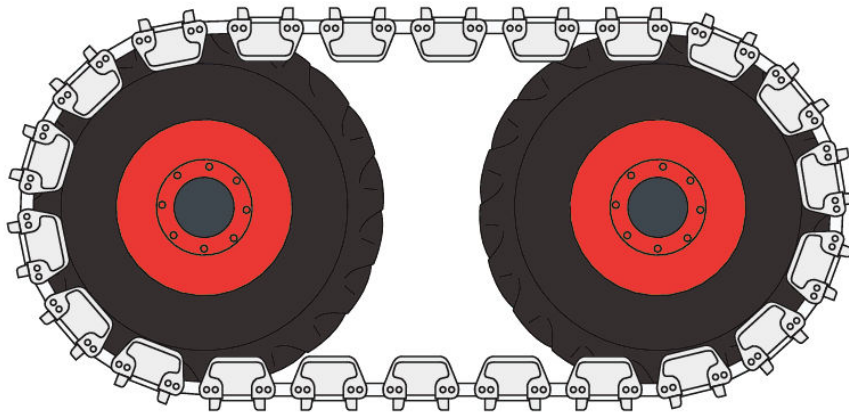

| Description | Item number | Overall width (mm) |
|---------------------------------|-------------|--------------------|
| Steel Tracks Package 400 Series | 7199506 | - |
| Steel Tracks Package 500 Series | 7222581 | - |
| Steel Tracks Package S630/S650 | 7178955 | - |
| Steel Tracks Package S770 | 7191754 | - |
| Steel Tracks Package S850 | 7191757 | - |

Weights

| Description | Item number | Operating weight (kg) | Shipping weight (kg) |
|---------------------------------|-------------|-----------------------|----------------------|
| Steel Tracks Package 400 Series | 7199506 | 420.0 | 420.0 |
| Steel Tracks Package 500 Series | 7222581 | 450.0 | 450.0 |
| Steel Tracks Package S630/S650 | 7178955 | 543.0 | 543.0 |
| Steel Tracks Package S770 | 7191754 | - | - |
| Steel Tracks Package S850 | 7191757 | 619.0 | 619.0 |

Characteristics and performance

| Description | Item number | Number of pads | Tyre size | Machine width with tracks (mm) |
|---------------------------------|-------------|----------------|-----------|--------------------------------|
| Steel Tracks Package 400 Series | 7199506 | 34 | 10-16.5 | - |
| Steel Tracks Package 500 Series | 7222581 | 34 | 10-16.5 | - |
| Steel Tracks Package S630/S650 | 7178955 | 38 | 12-16.5 | 2007.0 |
| Steel Tracks Package S770 | 7191754 | 38 | 12-16.5 | 2007.0 |
| Steel Tracks Package S850 | 7191757 | 42 | 14-17.5 | 2184.0 |

Main features

- Improves traction and flotation in soft, muddy and loose conditions.
- Open bar design utilizes the tyre to provide maximum traction and flotation
- The special design protects the tyre from wear and damage
- There is a built-in system for length adjustments, for optimum track adjustment in function of tyre and track wear
- Can be installed in less than 30 minutes or removed in 10 minutes.
- IMPORTANT: Only pneumatic tyres and tyres with Superflex formula poly fill manufactured by Arnco are permitted for use inside steel tracks. Original Bobcat® factory poly-filled tyres meet this requirement. All other tyres including Bobcat® Solid Tyres (Twin Flex, Smooth Flex, Smooth Solid, etc.) are not approved. Please note that the use of non-approved tyres will void the loader and track warranties

Applications

- Agriculture
- Construction and Demolition
- Forestry
- Grading and Leveling
- Landscaping
- Snow Removal

Loader Compatibility

| Description | Item number | Compatible with loader | Functional requirements |
|---------------------------------|-------------|--|-------------------------|
| Steel Tracks Package 500 Series | 7222581 | S510E IIIA, S510B, S530E IIIA, S530B, S550E IIIB, S550B iT4, S570B iT4, S590E IIIB, S590B iT4, S510E V, S530E V, S66, S510B, S530B, S550E V, S590E V | - |
| Steel Tracks Package S630/S650 | 7178955 | S630E iT4, S630B iT4, S76, S630B iT4, S650B iT4 | - |
| Steel Tracks Package S770 | 7191754 | S770E IV, S770E T3, S770B T3 | - |
| Steel Tracks Package S850 | 7191757 | S850E IV, S850E T3, S850B T3 | - |

BE OM **EN OFFERT**

Klicka bara på **knappen** eller skanna **QR-koden** nedan för åtkomst till vårt offertformulär.

Vi kontaktar dig så snart som möjligt. Tack!



BEGÄR OFFERT

